

Push-in fittings QS-F, Quick Star, metal

Technical data


FESTO

Push-in L-fitting QSL-F

360° rotatable

Male thread

with external hex

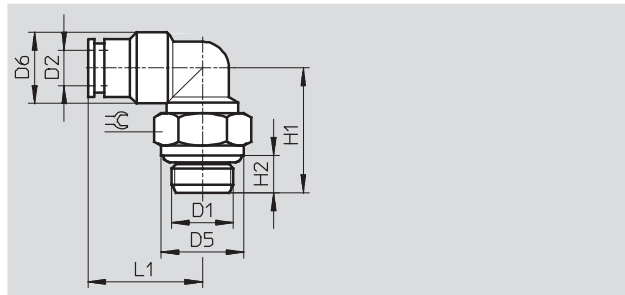

Dimensions and ordering data												
Connection	Nominal size	Tubing O.D.	D5 Ø	D6 Ø	H1	H2	L1	≈	Weight/ piece [g]	Part No.	Type	PU*
D1	[mm]	D2										
M thread with sealing ring												
M5	2.2	4	8	9	19.7	4	18.2	8	10.7	533849	QSL-F-M5-4	10
	2.2	6	8	11	19.7	4	20.6	8	14.7	533850	QSL-F-M5-6	10
M7	2.2	4	10.2	9	21.7	5.5	18.2	9	11.3	533851	QSL-F-M7-4	10
	2.2	6	10.2	11	21.7	5.5	20.6	9	15.6	533852	QSL-F-M7-6	10
G thread with sealing ring												
G1/8	3	4	12.8	11	18.2	5.5	17.7	13	17.6	193418	QSL-F-G1/8-4	10
	3.8	6	12.8	11	18.2	5.5	19.8	13	16	193419	QSL-F-G1/8-6	10
	3.8	8	12.8	13	20.2	5.5	23	13	20	193420	QSL-F-G1/8-8	10
G1/4	5	6	15.8	11	21	6.5	22.1	16	24.5	193421	QSL-F-G1/4-6	10
	6	8	15.8	13	21	6.5	23	16	24	193422	QSL-F-G1/4-8	10
	6	10	15.8	16	23	6.5	26.4	16	34.6	193423	QSL-F-G1/4-10	10
	6	12	15.8	19	23	6.5	28.9	16	49	533853	QSL-F-G1/4-12	10
G3/8	7	8	20	13	24	7.5	24.5	18	34.2	193424	QSL-F-G3/8-8	10
	8.8	10	20	16	24	7.5	26.4	18	36.6	193425	QSL-F-G3/8-10	10
	8.8	12	20	19	24	7.5	28.9	18	51.1	197486	QSL-F-G3/8-12	10
	8.8	14	20	21	28	7.5	31.5	18	65	570448	QSL-F-G3/8-14	1
G1/2	9	10	25	17	29	9	27.9	21	66	193426	QSL-F-G1/2-10	1
	10	12	25	19	29	9	28.9	21	70	193427	QSL-F-G1/2-12	1
	11.5	14	25	21	33	9	31.5	21	77	570449	QSL-F-G1/2-14	1

* Packaging unit quantity