


RACOR DE IMPLANTACIÓN: Racor de entrada, Codo rosca Macho BSP Cónica

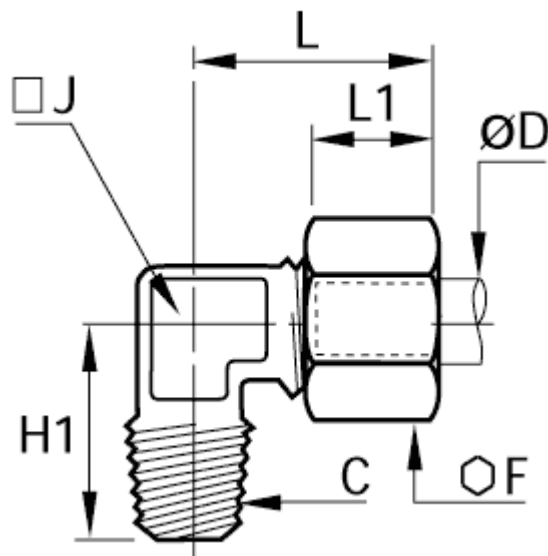

Dimensiones

Código	ØD (mm)	C	F (mm)	H1 (mm)	J (mm)	L maxi (mm)	L1 (mm)	 (kg)
0109 04 10	4	R1/8	10	17	8	19	9.5	0.01
0109 04 13	4	R1/4	10	20	10	19	11	0.02
0109 05 10	5	R1/8	12	17.5	8	21	11	0.02
0109 05 13	5	R1/4	12	21.5	10	22	12	0.03
0109 06 10	6	R1/8	13	18	8	22	11	0.02
0109 06 11	6	NPT1/8	13	18	8	22	11	0.02
0109 06 13	6	R1/4	13	21.5	10	22	12	0.03
0109 06 14	6	NPT1/4	13	21.5	10	22	12	0.03
0109 08 10	8	R1/8	14	18.5	10	28	15	0.03
0109 08 11	8	NPT1/8	14	18.5	10	28	15	0.03
0109 08 13	8	R1/4	14	22	10	28	15	0.03
0109 08 14	8	NPT1/4	14	22	10	28	15	0.03
0109 08 17	8	R3/8	14	24	12	28	15	0.04
0109 10 13	10	R1/4	19	25	12	30	14.5	0.05
0109 10 14	10	NPT1/4	19	25	12	30	14.5	0.05
0109 10 17	10	R3/8	19	25.5	12	30	14.5	0.06
0109 10 21	10	R1/2	19	32	19	36	21	0.11
0109 12 13	12	R1/4	22	26	15	30	15	0.07
0109 12 17	12	R3/8	22	27	15	30	15	0.08
0109 12 21	12	R1/2	22	32	19	36	21	0.11
0109 14 17	14	R3/8	24	30	19	35	18	0.07

RACORES UNIVERSALES DE LATÓN

0109 14 21	14	R1/2	24	32	19	35	18	0.08
0109 15 17	15	R3/8	24	30	19	35	18	0.1
0109 15 21	15	R1/2	24	32	19	35	18	0.11
0109 16 17	16	R3/8	27	30	19	39	21	0.12
0109 16 21	16	R1/2	27	33.5	19	39	21	0.13
0109 16 27	16	R3/4	27	36.5	23	41	23	0.18
0109 18 21	18	R1/2	30	35.5	23	41	21.5	0.17
0109 18 27	18	R3/4	30	36.5	23	41	21.5	0.19
0109 20 21	20	R1/2	32	36.5	23	42	21.5	0.18
0109 20 27	20	R3/4	32	38	23	42	21.5	0.19
0109 22 27	22	R3/4	36	40	27	50	30	0.28
0109 22 34	22	R1	36	44	27	50	30	0.33
0109 25 27	25	R3/4	41	43	27	54	30	0.32
0109 25 34	25	R1	41	44	27	54	30	0.35
0109 28 27	28	R3/4	42	46	32	54	30	0.39
0109 28 34	28	R1	42	48	32	54	30	0.37

Especificaciones

La presión máxima de un circuito depende de la calidad y el diámetro d el tubo, y de la temperatura.

	°C (Celsius)	F (Fahrenheit)	K (Kelvin)
temperatura de utilización	de -40 a 100	de -40 a 212	de 233 a 373
cuerpo	latón		